


PolyJet 3D Printers Systems and Materials.



**Precision.
Power.
Pace.
Productivity.**



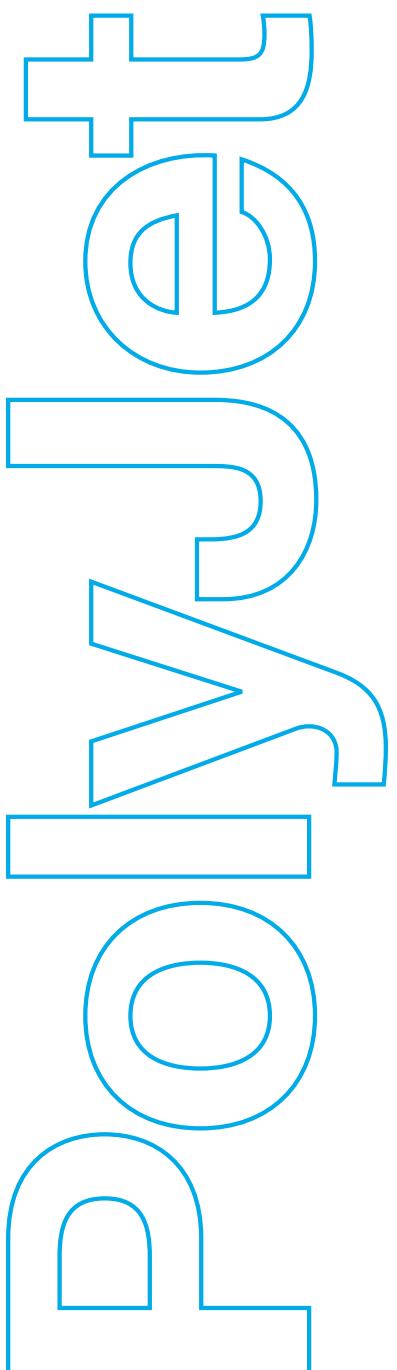

Broad versatility. Brilliant realism.

PolyJet™ 3D Printers empower professional designers, engineers, educators and healthcare professionals to create and problem-solve with precision, speed and realism. The power lies with PolyJet technology, curable liquid photopolymers capable of producing very fine layers for smooth surfaces, intricate details and vivid color.

The versatility of PolyJet technology is based on a wide range of available material properties and a suite of 3D printers to suit varied budgets and applications. No matter the industry, PolyJet technology provides the power to solve problems and create opportunities.

- Product designers and developers can create realistic prototypes and models with full-color elements, labels and true-to-life textures in one operation, to gain focus-group feedback before committing to full production.
- Full-color, flexible materials enable lifelike anatomical models for physician training and pre-surgical planning that lower operating room costs and improve patient outcomes.
- Injection molds made with simulated engineering plastic are produced faster and for less cost than metal molds, making low-volume production economically viable.
- Dental labs can increase productivity by making multiple models and try-ins in a single print operation to boost production capacity and fuel growth.

Simple choice. Any application.

PolyJet 3D Printers are scaled to meet diverse needs in capability and production capacity. The printers fall within two groups: single-material printers that jet one material (base resin) at a time and multi-material printers with the capacity to jet several base resins simultaneously.

Single-material.

Single-material printers start with affordable desktop models, featuring PolyJet technology's fine resolution and smooth surface finish. Depending on the specific model, these printers employ a single base resin or several base resins, with a choice of either rigid or flexible characteristics. All single-material printers use SUP705 support material, removable with a WaterJet. Several models are also compatible with SUP706B soluble support for hands-free, labor-saving support removal.

Vivid cyan light



Multi-material.

Multi-material printers offer the most in PolyJet versatility, performance and productivity, exploiting the benefits of multi-jetting technology. Multi-material printers enable mixed parts, the combination of several base resins in the same part and Digital Materials, individual base resins blended to create new materials with distinct properties. Mixed trays are also possible, meaning one build tray can accommodate multiple parts made with different materials, increasing production efficiency. Large-capacity needs are easily handled by the Objet1000 Plus™, boasting the largest build volume of any PolyJet 3D Printer.

At the top of the versatility and performance spectrum are the Stratasys J735™ and Stratasys J750™, equipped with over 500,000 colors, texture-mapping and the full complement of rigid and flexible materials. These printers provide the capability to produce everything from visually stunning, ultra-real prototypes to tools featuring soft-touch parts, to visually and tactiley realistic medical models.



Over 500,000 colors.

Glasses frame



Vivid tail light



Dental color models



Agilus motion tracker



Agilus console




Model head



Vivid console



These printers provide the capability to produce everything from visually stunning, ultra-real prototypes to tools featuring soft-touch parts, to visually and tactiley realistic medical models.

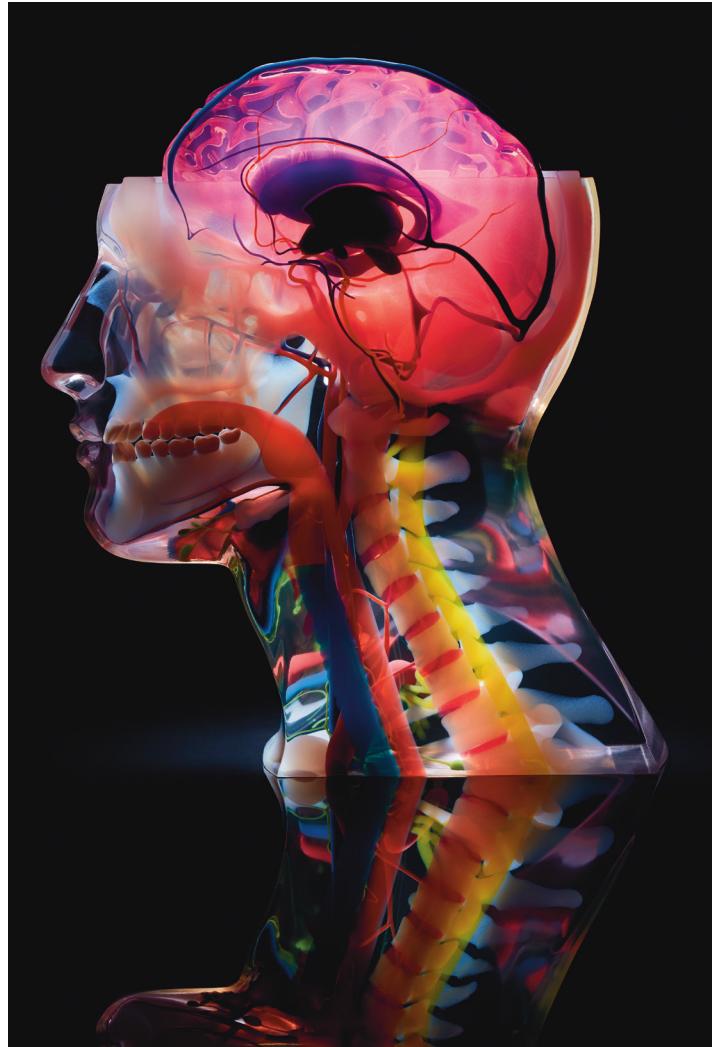

Our 3D PolyJet printers.

More materials. More potential.



	Objet30 Pro	Objet30 Prime™	Objet Eden260VS™
Maximum Build Size (XYZ)	294 x 192 x 148.6 mm (11.57 x 7.55 x 5.85 in.)	294 x 192 x 148.6 mm (11.57 x 7.55 x 5.85 in.)	255 x 252 x 200 mm (10.0 x 9.9 x 7.9 in.)
System Size	826 x 600 x 620 mm (32.5 x 23.6 x 24.4 in.)	826 x 600 x 620 mm (32.5 x 23.6 x 24.4 in.)	870 x 1200 x 735 mm (34.2 x 47.2 x 29 in.)
System Weight	106 kg (234 lbs.)	106 kg (234 lbs.)	254 kg (559 lbs.)
Layer Thickness	28 microns (0.0011 in.), 16 microns (0.0006 in.) for VeroClear material	28 microns (0.0011 in.) for Tango™ materials; 16 microns (0.0006 in.) for all other materials	Horizontal build layers as fine as 16 microns (.0006 in.)
Accuracy ¹	0.1 mm (0.0039 in.)	0.1 mm (0.0039 in.)	20-85 microns for features below 50 mm; up to 200 microns for full model size
Model Material Options	<ul style="list-style-type: none"> • Rigid Opaque: VeroWhitePlus™, VeroGray™, VeroBlue™, VeroBlack™, VeroBlackPlus™ • Transparent: VeroClear™ • Simulated Polypropylene: Rigur™, Durus™ • High Temperature 	<ul style="list-style-type: none"> • Rigid Opaque: VeroWhitePlus, VeroGray, VeroBlue, VeroBlack, VeroBlackPlus • Transparent: VeroClear and RGD720 • Simulated Polypropylene: Rigur, Durus • High Temperature • Rubber-Like²: TangoGray™ and TangoBlack™ • Bio-compatible 	<ul style="list-style-type: none"> • Rigid Opaque: VeroWhitePlus, VeroBlackPlus², VeroGray, VeroBlue • Rubber-like²: TangoPlus™, TangoBlackPlus™, TangoBlack, TangoGray • Transparent: VeroClear and RGD7202 • Simulated Polypropylene²: Rigur and Durus • High Temperature² • Bio-compatible²
Digital Material Options	–	–	–
Support Material	SUP705 (WaterJet removable) SUP706B (soluble)	SUP705 (WaterJet removable) SUP706B (soluble)	SUP705 (WaterJet removable) SUP707 (soluble)
Software	Objet Studio™	Objet Studio™	Objet Studio™



Objet260 Connex1

Objet500 Connex1

Maximum Build Size (XYZ)	255 x 252 x 200 mm (10.0 x 9.9 x 7.9 in.)	490 x 390 x 200 mm (19.3 x 15.4 x 7.9 in.)
System Size	870 x 1200 x 735 mm (34.2 x 47.2 x 29 in.) Material Cabinet: 330 x 1170 x 640 mm (13 x 46.1 x 25.2 in.)	1400 x 1260 x 1100 mm (55.1 x 49.6 x 43.4 in.) Material Cabinet: 330 x 1170 x 640 mm (13 x 46.1 x 26.2 in.)
System Weight	264 kg (581 lbs.) Material Cabinet: 76 kg (168 lbs.)	430 kg (948 lbs.) Material Cabinet: 76 kg (168 lbs.)
Layer Thickness	Horizontal build layers as fine as 16 microns (.0006 in.)	Horizontal build layers as fine as 16 microns (.0006 in.)
Accuracy ¹	Up to 200 microns for full model size (for rigid materials only, depending on geometry, build parameters and model orientation)	Up to 200 microns for full model size (for rigid materials only, depending on geometry, build parameters and model orientation)
Model Material Options	<ul style="list-style-type: none">• Rigid Opaque: VeroWhitePlus, Vero PureWhite™, VeroBlackPlus, VeroGray and VeroBlue• Rubber-like: Agilus30™, TangoPlus, TangoBlackPlus, TangoBlack, TangoGray• Transparent: VeroClear and RGD720• Simulated Polypropylene: Rigur and Durus• High Temperature• Bio-compatible	<ul style="list-style-type: none">• Rigid Opaque: VerWhitePlus, Vero PureWhite™, VeroBlackPlus, VeroGray and VeroBlue• Rubber-like: Agilus30™, TangoPlus, TangoBlackPlus, TangoBlack, TangoGray• Transparent: VeroClear and RGD720• Simulated Polypropylene: Rigur and Durus• High Temperature• Bio-compatible
Digital Material Options	–	–
Support Material	SUP705 (WaterJet removable) SUP706B (soluble)	SUP705 (WaterJet removable) SUP706B (soluble)
Software	Objet Studio™	Objet Studio™

¹ Varies depending on part geometry, size, orientation, material and post-processing method.

² Works with SUP705 support material only

Continued...



	Objet260 Connex3™	Objet350 Connex3™	Objet500 Connex3™
Maximum Build Size (XYZ)	255 x 252 x 200 mm (10.0 x 9.9 x 7.9 in.)	342 x 342 x 200 mm (13.4 x 13.4 x 7.9 in.)	490 x 390 x 200 mm (19.3 x 15.4 x 7.9 in.)
System Size	870 x 1200 x 735 mm (34.2 x 47.2 x 29 in.) Material Cabinet: 330 x 1170 x 640 mm (13 x 46.1 x 25.2 in.)	1,400 x 1,260 x 1,100 mm (55.1 x 49.6 x 43.4 in.); Material Cabinet: 330 x 1170 x 640 mm (13 x 46.1 x 26.2 in.)	1,400 x 1,260 x 1,100 mm (55.1 x 49.6 x 43.4 in.); Material Cabinet: 330 x 1170 x 640 mm (13 x 46.1 x 26.2 in.)
System Weight	264 kg (581 lbs.) Material Cabinet: 76 kg (168 lbs.)	430 kg (948 lbs.) Material Cabinet: 76 kg (168 lbs.)	430 kg (948 lbs.) Material Cabinet: 76 kg (168 lbs.)
Layer Thickness	Horizontal build layers as fine as 16 microns (.0006 in.)	Horizontal build layers as fine as 16 microns (.0006 in.)	Horizontal build layers as fine as 16 microns (.0006 in.)
Accuracy ¹	Up to 200 microns for full model size (for rigid materials only, depending on geometry, build parameters and model orientation)	Up to 200 microns for full model size (for rigid materials only, depending on geometry, build parameters and model orientation)	Up to 200 microns for full model size (for rigid materials only, depending on geometry, build parameters and model orientation)
Model Material Options	<ul style="list-style-type: none"> • Rigid Opaque: VeroWhitePlus, Vero PureWhite, VeroBlackPlus, VeroGray and VeroBlue; VeroCyan™, VeroMagenta™ and VeroYellow™; VeroMagentaV™ and VeroYellowV™ • Rubber-like: Agilus30, TangoPlus, TangoBlackPlus, TangoBlack, TangoGray • Transparent: VeroClear and RGD720 • Simulated Polypropylene: Rigur and Durus • High Temperature • Bio-compatible 	<ul style="list-style-type: none"> • Rigid Opaque: VeroWhitePlus, Vero PureWhite, VeroBlackPlus, VeroGray and VeroBlue; VeroCyan™, VeroMagenta™ and VeroYellow™; VeroMagentaV™ and VeroYellowV™ • Rubber-like: Agilus30, TangoPlus, TangoBlackPlus, TangoBlack, TangoGray • Transparent: VeroClear and RGD720 • Simulated Polypropylene: Rigur and Durus • High Temperature • Bio-compatible 	<ul style="list-style-type: none"> • Rigid Opaque: VeroWhitePlus, Vero PureWhite, VeroBlackPlus, VeroGray and VeroBlue; VeroCyan™, VeroMagenta™ and VeroYellow™; VeroMagentaV™ and VeroYellowV™ • Rubber-like: Agilus30, TangoPlus, TangoBlackPlus, TangoBlack, TangoGray • Transparent: VeroClear and RGD720 • Simulated Polypropylene: Rigur and Durus • High Temperature • Bio-compatible
Digital Material Options	<ul style="list-style-type: none"> • Vibrant blended colors in Rigid Opaque • Translucent colored tints • Rubber-like materials in a variety of Shore A values • Digital ABS Plus™ for durability, including blends with rubber • Simulated polypropylene materials with improved heat resistance 	<ul style="list-style-type: none"> • Vibrant blended colors in Rigid Opaque • Translucent colored tints • Rubber-like materials in a variety of Shore A values • Digital ABS Plus™ for durability, including blends with rubber • Simulated polypropylene materials with improved heat resistance 	<ul style="list-style-type: none"> • Vibrant blended colors in Rigid Opaque • Translucent colored tints • Rubber-like materials in a variety of Shore A values • Digital ABS Plus™ for durability, including blends with rubber • Simulated polypropylene materials with improved heat resistance
Support Material	SUP705 (WaterJet removable) SUP706 (soluble)	SUP705 (WaterJet removable) SUP706 (soluble)	SUP705 (WaterJet removable) SUP706 (soluble)
Software	Objet Studio™ GrabCAD Print™	Objet Studio™ GrabCAD Print™	Objet Studio™ GrabCAD Print™



	Stratasys J735™	Stratasys J750™	Objet1000 Plus™
Maximum Build Size (XYZ)	350 x 350 x 200 mm (13.7 x 13.7 x 7.6 in.)	490 x 390 x 200 mm (19.3 x 15.35 x 7.9 in.)	1000 x 800 x 500 mm (39.3 x 31.4 x 19.6 in.) Max model weight on tray: 135 kg
System Size	1,400 x 1,260 x 1,100 mm (55.1 x 49.6 x 43.3 in.) Material Cabinet: 670 x 1170 x 640 mm (26.4 x 46.1 x 25.2 in)	1,400 x 1,260 x 1,100 mm (55.1 x 49.6 x 43.3 in.) Material Cabinet: 670 x 1170 x 640 mm (26.4 x 46.1 x 25.2 in)	1960 x 2868 x 2102 mm (77.5 x 113 x 83 in.);
System Weight	430 kg (948 lbs.) Material Cabinet: 152 kg (335 lbs.)	430 kg (948 lbs.) Material Cabinet: 152 kg (335 lbs.)	2,200 kg (4,850 lbs.)
Layer Thickness	Horizontal build layers down to 14 microns (.00055 in.)	Horizontal build layers down to 14 microns (.00055 in.)	Horizontal build layers as fine as 16 microns (0.0006 in.)
Accuracy ¹	Up to 200 microns for full model size (for rigid materials only, depending on geometry, build parameters and model orientation)	Up to 200 microns for full model size (for rigid materials only, depending on geometry, build parameters and model orientation)	Up to 600 microns for full model size (for rigid materials only, depending on geometry, build parameters and model orientation)
Model Material Options	<ul style="list-style-type: none"> Full Vero family of opaque materials including neutral shades and vibrant colors Rubber-like: Tango and Agilus families of flexible materials Transparent: VeroClear and RGD720 VeroFlex™ and VeroFlexVivid™ families 	<ul style="list-style-type: none"> Full Vero family of opaque materials including neutral shades and vibrant colors Rubber-like: Tango and Agilus families of flexible materials Transparent: VeroClear and RGD720 VeroFlex™ and VeroFlexVivid™ families 	<ul style="list-style-type: none"> Transparent: VeroClear Rubber-like: TangoPlus and TangoBlackPlus Rigid Opaque: Vero family Simulated Polypropylene: Rigur
Digital Material Options	Unlimited number of composite materials including: <ul style="list-style-type: none"> Over 500,000 colors Digital ABS Plus and Digital ABS2 Plus in ivory and green materials in a variety of Shore A values Translucent color tints 	Unlimited number of composite materials including: <ul style="list-style-type: none"> Over 500,000 colors Digital ABS Plus and Digital ABS2 Plus in ivory and green materials in a variety of Shore A values Translucent color tints 	<ul style="list-style-type: none"> Transparent shades and patterns Rigid Opaque shades Rubber-like blends in a range of Shore A values Simulated Polypropylene blends in rigid and flexible options
Support Material	SUP705 (WaterJet removable) SUP706B (soluble)	SUP705 (WaterJet removable) SUP706B (soluble)	SUP705 (WaterJet removable)
Software	PolyJet Studio™, GrabCAD Print™	PolyJet Studio™, GrabCAD Print™	GrabCAD Print™

¹ Varies depending on part geometry, size, orientation, material and post-processing method.

² Works with SUP705 support material only

Countless combinations. Limitless possibilities.

PolyJet 3D Printers use photopolymers, which are capable of simulating properties ranging from rubber-like to transparent – even high toughness and heat resistance.

Digital Materials expand the possibilities by blending two or more base resins to create thousands of material combinations. Achieve full color capabilities, translucencies, Shore A values and other properties for maximum product realism.

Material	Highlights
Digital Materials	<ul style="list-style-type: none">Wide range of flexibility, from Shore A 27 to Shore A 95Rigid materials ranging from simulated standard plastics to the toughness and temperature resistance of Digital ABS PlusVibrant colors in rigid or flexible materials, with over 500,000 color options on the Stratasys J750Available on PolyJet multi-jetting 3D printers
Digital ABS Plus	<ul style="list-style-type: none">Simulates ABS plastics by combining strength with high temperature resistanceDigital ABS2 Plus offers enhanced dimensional stability for thin-walled partsIdeal for functional prototypes, snap-fit parts for high or low temperature usage, electrical parts, castings, mobile telephone casings and engine parts and covers
High Temperature	<ul style="list-style-type: none">Exceptional dimensional stability for thermal functional testingCombine with PolyJet rubber-like materials to produce varying Shore A values, gray shades and high temperature parts with overmoldingIdeal for form, fit and thermal functional testing, high-definition models requiring excellent surface quality, exhibition models that endure strong lighting conditions, taps, pipes and household appliances, hot air and hot water testing
Transparent	<ul style="list-style-type: none">Print clear and tinted parts and prototypes with VeroClear and RGD720Combine with color materials for stunning transparent shadesIdeal for form and fit testing of see-through parts, like glass, consumer products, eyewear, light covers and cases, visualization of liquid flow, medical applications, artistic and exhibition modeling
Rigid Opaque	<ul style="list-style-type: none">Brilliant color options for unprecedented design freedomCombine with rubber-like materials for overmolding, soft touch handles and moreIdeal for fit and form testing, moving and assembled parts, sales, marketing and exhibition models assembly of electronic components and silicone molding
Simulated Polypropylene	<ul style="list-style-type: none">Simulates the appearance and functionality of polypropyleneIdeal for prototyping containers and packaging, flexible snap-fit applications and living hinges, toys, battery cases, laboratory equipment, loudspeakers and automotive components
Rubber-like	<ul style="list-style-type: none">Offers various levels of elastomer characteristicsCombine with rigid materials for a variety of Shore A values, from Shore A 27 to Shore A 95Ideal for rubber surrounds and overmolding, soft-touch coatings and nonslip surfaces, knobs, grips, pulls, handles, gaskets, seals, hoses, footwear, and exhibition and communication models
Biocompatible	<ul style="list-style-type: none">Features high dimensional stability and colorless transparencyHas five medical approvals including cytotoxicity, genotoxicity, delayed type hypersensitivity, irritation and USP plastic class VIIdeal for applications requiring prolonged skin contact of more than 30 days and short-term mucosal-membrane contact of up to 24 hours

In-depth detail: our materials explained.

	Digital ABS Plus	High Temperature	Transparent	
Materials	Digital ABS Plus, Green, made of RGD515 Plus & RGD535	RGD525	RGD720	VeroClear RGD810
	Digital ABS Plus, Ivory, made of RGD515 Plus & RGD531			
Tensile Strength	55 – 60 MPa (8,000 – 8,700 psi)	70 – 80 MPa (10,000 – 11,500 psi)	50 – 65 MPa (7,250 – 9,450 psi)	50 – 65 MPa (7,250 – 9,450 psi)
Elongation at Break	25 – 40%	10 – 15%	15 – 25%	10 – 25%
Modulus of Elasticity	2,600 – 3,000 MPa (375,000 – 435,000 psi)	3,200 – 3,500 MPa (465,000 – 510,000 psi)	2,000 – 3,000 MPa (290,000 – 435,000 psi)	2,000 – 3,000 MPa (290,000 – 435,000 psi)
Flexural Strength	65 – 75 MPa (9,500 – 11,000 psi)	110 – 130 MPa (16,000 – 19,000 psi)	80 – 110 MPa (12,000 – 16,000 psi)	75 – 110 MPa (11,000 – 16,000 psi)
Flexural Modulus	1,700 – 2,200 MPa (245,000 – 320,000 psi)	3,100 – 3,500 MPa (450,000 – 510,000 psi)	2,700 – 3,300 MPa (390,000 – 480,000 psi)	2,200 – 3,200 MPa (320,000 – 465,000 psi)
HDT, °C @ 1.82 MPa	51 – 55 °C (124 – 131 °F)	55 – 57 °C (131 – 135 °F)	45 – 50 °C (113 – 122 °F)	45 – 50 °C (113 – 122 °F)
Izod Notched Impact	90-110 J/m (1.69-2.06 ft lb/in)	14-16 J/m (0.262-0.300 ft lb/inch)	20-30 J/m (0.375-0.562 ft lb/inch)	20-30 J/m (0.375-0.562 ft lb/inch)
Water Absorption	–	1.2 – 1.4%	1.5 – 2.2%	1.1 – 1.5%
Tg	47 – 53 °C (117 – 127 °F)	62 – 65 °C (144 – 149 °F)	48 – 50 °C (118 – 122 °F)	52 – 54 °C (126 – 129 °F)
Shore Hardness	85 – 87 Scale D	87 – 88 Scale D	83 – 86 Scale D	83 – 86 Scale D
Rockwell Hardness	67 – 69 Scale M	78 – 83 Scale M	73 – 76 Scale M	73 – 76 Scale M
Polymerized Density	1.17 – 1.18 g/cm ³	1.17 – 1.18 g/cm ³	1.18 – 1.19 g/cm ³	1.18 – 1.19 g/cm ³
Ash Content	–	0.38 – 0.42%	0.01 – 0.02%	0.02 – 0.06%

Continued...

	Rigid Opaque (Vero family)	Simulated Polypropylene		
Materials	Vero PureWhite™ RGD837, VeroGray RGD850, VeroBlackPlus RGD875, VeroWhitePlus RGD835, VeroYellow RGD836, VeroCyan RGD841, VeroMagenta RGD851, VeroMagentaV, VeroYellowV, VeroCyanV™	VeroBlue RGD840	Durus White RGD430	MED610
Tensile Strength	50 – 65 MPa (7,250 – 9,450 psi)	50 – 60 MPa (7,250 – 8,700 psi)	20 – 30 MPa (2,900 – 4,350 psi)	50 – 65 MPa (7,252 – 9,427 psi)
Elongation at Break	10 – 25%	15 – 25%	40 – 50%	10 – 25%
Modulus of Elasticity	2,000 – 3,000 MPa (290,000 – 435,000 psi)	2,000 – 3,000 MPa (290,000 – 435,000 psi)	1,000 – 1,200 MPa (145,000 – 175,000 psi)	2,000 – 3,000 MPa (290.1 – 435.1 ksi)
Flexural Strength	75 – 110 MPa (11,000 – 16,000 psi)	60 – 70 MPa (8,700 – 10,200 psi)	30 – 40 MPa (4,350 – 5,800 psi)	75 – 110 MPa (10,878 – 15,954 psi)
Flexural Modulus	2,200 – 3,200 MPa (320,000 – 465,000 psi)	1,900 – 2,500 MPa (265,000 – 365,000 psi)	1,200 – 1,600 MPa (175,000 – 230,000 psi)	2,200 – 3,200 MPa (319.1 – 464.1 ksi)
HDT, °C @ 1.82 MPa	45 – 50 °C (113 – 122 °F)	45 – 50 °C (113 – 122 °F)	32 – 34 °C (90 – 93 °F)	40 – 50 °C (113 – 122 °F)
Izod Notched Impact	20 – 30 J/m (0.375 – 0.562 ft lb/inch)	20 – 30 J/m (0.375 – 0.562 ft lb/inch)	40 – 50 J/m (0.749 – 0.937 ft lb/inch)	20 – 30 (0.37 – 0.56 ft-lb/in)
Water Absorption	1.1 – 1.5%	1.5 – 2.2%	1.5 – 1.9%	1.1 – 1.5%
Tg	52 – 54 °C (126 – 129 °F)	48 – 50 °C (118 – 122 °F)	35 – 37 °C (95 – 99 °F)	52 – 54 °C (126 – 130 °F)
Shore Hardness	83 – 86 Scale D	83 – 86 Scale D	74 – 78 Scale D	83 – 86 Scale D
Rockwell Hardness	73 – 76 Scale M	73 – 76 Scale M	–	73 – 76 M
Polymerized Density	1.17 – 1.18 g/cm³	1.18 – 1.19 g/cm³	1.15 – 1.17 g/cm³	1.17 – 1.18 (g/cm³) (0.676 – 0.682 oz/in³)
Ash Content	0.23 – 0.26% (VeroGray, VeroWhitePlus), 0.01 – 0.02% (VeroBlackPlus, VeroMagentaV, VeroYellowV)	0.21 – 0.22%	0.10 – 0.12%	–

Rubber-like

Materials	TangoBlack FLX973	TangoGray FLX950	Agilus30 FLX985, Agilus30 FLX935	Agilus30 White FLX945	TangoBlackPlus FLX980, TangoPlus FLX930
Tensile Strength	1.8 – 2.4 MPa (115 – 350 psi)	3.0 – 5.0 MPa (435 – 725 psi)	2.4 – 3.1 MPa (348 – 450 psi)	2.1 – 2.6 MPa (305 – 377 psi)	0.8 – 1.5 MPa (115 – 220 psi)
Elongation at Break	45 – 55%	45 – 55%	220 – 240%	185 – 230%	170 – 220%
Modulus of Elasticity	–	–	–	–	–
Flexural Strength	–	–	–	–	–
Flexural Modulus	–	–	–	–	–
HDT, °C @ 1.82 MPa	–	–	–	–	–
Izod Notched Impact	–	–	–	–	–
Water Absorption	–	–	–	–	–
Tg	–	–	–	–	–
Shore Hardness	60 – 62 Scale A	73 – 77 Scale A	30 – 35 Scale A	30 – 40 Scale A	26 – 28 Scale A
Rockwell Hardness	–	–	–	–	–
Polymerized Density	1.14 – 1.15 g/cm ³	1.16 – 1.17 g/cm ³	1.14 – 1.15 g/cm ³	1.14 – 1.15 g/cm ³	1.12 – 1.13 g/cm ³
Ash Content	–	–	–	–	–

Continued...

VeroFlex, VeroFlexVivid™		
	Test Method	Value
Tensile Strength	D-6338-03	43 – 64 MPa (6,237 – 9,282 psi)
Elongation at Break	D-638-05	8 – 20%
Modulus of Elasticity	D-638-04	950 – 1600 MPa (137,786 – 232,060 psi)
Flexural Strength	D-790-03	48 – 88 MPa (6962 – 12,763 psi)
Flexural Modulus	D-790-04	1,600 – 2,300 MPa (232,061 – 333,587 psi)
Shore Hardness	D-2240	75 – 85 Scale D
HDT, @ 0.45 MPa	D-648-06	42 – 50 °C (108 – 122 °F)
Izod Notched Impact	D-256-06	20 – 30 J/m (0.375 – 0.562 lb/in)

**PolyJet
makes
perfect.**



Advanced materials. Designed to give you more.

We not only provide the widest choice of materials, we'll also help you get the best out of them.

We're continually developing and investing in our hardware, software and services to help you get the best possible results. Improving accuracy, flexibility and reliability. All in less time, with less hassle.

Make it with Stratasys.

Stratasys Services

Protect Your Investment - Ensure productivity, system uptime and extend performance with our Service Packages.

Contact us: Contract.emea@stratasys.com

Stratasys Academy

Stratasys Academy enables you to maximize efficiency and get the most out of your investment.

Contact us: Training.emea@stratasys.com

Stratasys Consulting

Advising companies how to best leverage 3D Printing to drive innovation, productivity and cost savings throughout an organization.

Contact us: Consulting@stratasys.com

Get in touch.

Europe

Stratasys GmbH
Airport Boulevard B120
77836 Rheinmünster, Germany

+49-7229-7772-0
+49-7229-7772-990 (Fax)

HEADQUARTERS

USA

7665 Commerce Way,
Eden Prairie, MN 55344, USA

+1 800 801 6491 (US Toll Free)
+1 952 937 3000 (Intl)
+1 952 937 0070 (Fax)

Israel

1 Holtzman St., Science Park,
PO Box 2496 Rehovot 76124, Israel

+972 74 745 4000
+972 74 745 5000 (Fax)

ISO 9001:2008 Certified

© 2018 Stratasys. All rights reserved. Stratasys, Stratasys signet, Objet, PolyJet, Connex, Connex1, Connex2, Stratasys J735, Stratasys J750, Objet30 Pro, Objet30 Prime, Objet1000 Plus, Objet Studio, PolyJet Studio, Eder260VS, Objet260, Objet350, Objet500 Connex3, Agilus30, Tango, TangoPlus, TangoGray, TangoBlack, TangoBlackPlus, Vero, VeroClear, VeroWhitePlus, Vero PureWhite, VeroGray, VeroBlue, VeroBlack, VeroBlackPlus, VeroCyan, VeroMagenta, VeroMagentaV, VeroYellow, VeroYellowW, VeroCyanV, VeroFlex, VeroFlexVivid, Durus, Riger, Digital ABS, Digital ABS Plus, SUP706B, GrabCAD Print, Digital ABS2 and Digital ABS2 Plus are trademarks of Stratasys Ltd. and/or its subsidiaries or affiliates and may be registered in certain jurisdictions. All other trademarks belong to their respective owners. PSS_PJ_PolyJetSystemsOverview_A4_1118a